



PERFORMANCE BULLETIN

 Product Application Service General

news from

**Pentair**
Water Treatment


May 31, 2000

3150/3900 Drive Switch Clearance with New Drive Cam

In April 1998, we made an improvement to the 16494-drive cam assembly. The brine cam lobes¹ are .100" thicker to open the 1800-brine valve for brine draw and brine tank refill. In order to make the screw clearance² for the micro switches; we have eliminated the outside insulator³. All Fleck wiring harnesses are UL component recognized and do not require the additional insulator.

1. Brine Cam Lobe

3. No Insulator

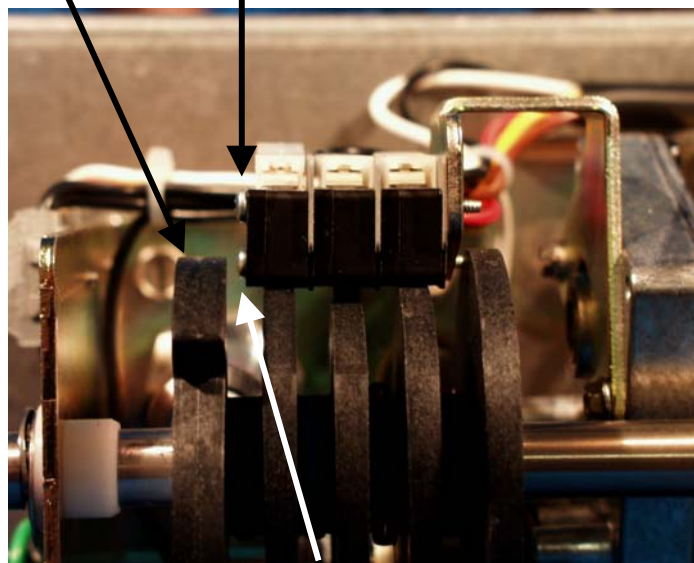

2. Clearance

As always, thank you for using Fleck controls.

Sincerely,
Pentair Water Treatment, Inc.

Jay Runkle
Technical/Product Support