

New!

CATALOG PRH

Thermoplastic Pressure Regulator

Permits Downstream Pressure Settings Up To 125 PSI

**Designed for Higher Flow Capacities, and ...
Achieved with Less System Pressure Loss!**



Superior Features:

- Converts varying inlet pressure up to 150 PSI, to a stabilized, lower pre-set downstream pressure.
- This protects sensitive downstream instruments, tubing and filters against damage from overpressure/pressure surges; permits the entire system to operate safely and effectively.
- Downstream pressure settings adjustable from 30 PSI to 125 PSI.
- Large surface area of its frictionless rolling diaphragm provides exceptional sensitivity.
- Free movement of the diaphragm on a balanced shaft assures smooth, accurate performance and reliable sealing for millions of cycles.
- Double U-cups prevent leakage along the shaft and eliminates the possibility of "creep."
- For corrosive and ultra-pure liquid applications.
- Sizes: 1/4", 1/2", 3/4", 1", 1 1/2", 2" and 3".

Materials of Construction and Piping Connections:

The standard connections are female NPT threaded ports. Socket, flanged and spigot connections are also available. Standard body materials are PVC, Natural Polypropylene, Teflon® PTFE and Kynar® PVDF. Standard seal materials are Viton®, EPDM and Buna-N. Some Kynar PVDF components are used in the Natural Polypropylene and Teflon models for strength.

Pressure Regulator Selection:

In the selection of a liquid pressure regulator, flow capacity with minimum system pressure loss are critical criteria, but it should be recognized that all similar-size competitive regulators do not provide similar performance levels. The new Series PRH regulators provide not only higher set pressures and flow capacities with each model, but these are achieved with less pressure losses than with similar size competitive regulators. These lower pressure drop-offs can be seen from the performance curve chart shown on the next page.



PLAST-O-MATIC VALVES, INC.

1384 Pompton Avenue, Cedar Grove, New Jersey 07009-1095

(973) 256-3000 • Fax (973) 256-4745 • www.plastomatic.com

SERIES PRH PRESSURE REGULATOR

Design:

Plast-O-Matic Series PRH Pressure Regulators are designed to handle corrosive and ultra-pure liquids with inlet pressures up to 150 PSI at 75°F. Standard downstream set pressure range is 30 to 125 PSI. The normally-open regulators incorporate a poppet seat at the valve orifice to prevent sticking and affecting the sensing of the downstream line pressure. Also, one piece body construction and dual U-cup shaft seals help to eliminate internal leakage that could cause the set pressure to creep beyond a safe limit. A unique, large-surface, rolling diaphragm seal isolates the spring chamber from downstream pressure sensing liquid. This unique design, in conjunction with a pressure balanced shaft, assures smooth performance and stable control. **CAUTION:** Avoid quick closing valve downstream of a regulator to eliminate "water hammer" shock that can cause breakage.


Operation:

Series PRH pressure regulators prevent downstream pressure from exceeding the desired set pressure. Regulator will remain closed as long as set pressure is maintained. As equipment or valve downstream of regulator begin to open and demand flow, the downstream pressure begins to fall and the regulator begins to open. As valves or equipment downstream open further, the pressure regulator continues to open until the maximum opening is reached. As the process is reversed, downstream pressure begins to increase and the regulator starts closing. When the downstream pressure again reaches set pressure the regulator closes bubble-tight. **IMPORTANT:** It should be noted from the preceding explanation that a pressure regulator does not maintain a specific downstream pressure, but only prevents the downstream pressure from exceeding a set point.

Typical Performance Curves of Flow vs. Drop Off From Set Pressure:

Drop-off is the difference between the pressure regulator set pressure and the downstream pressure. Performance curves chart at right identifies the high flow capacities and the low pressure drop-off of Plast-O-Matic regulators which result in their greater sensitivity, finer adjustability and superior accuracy as compared to competitive models.

Typical Pressure Regulator Performance Curves
Flow Capacity vs. Pressure Drop-Off (PSI)
Comparison of Representative Plast-O-Matic Models
with Competitors "A", "B", & "C"

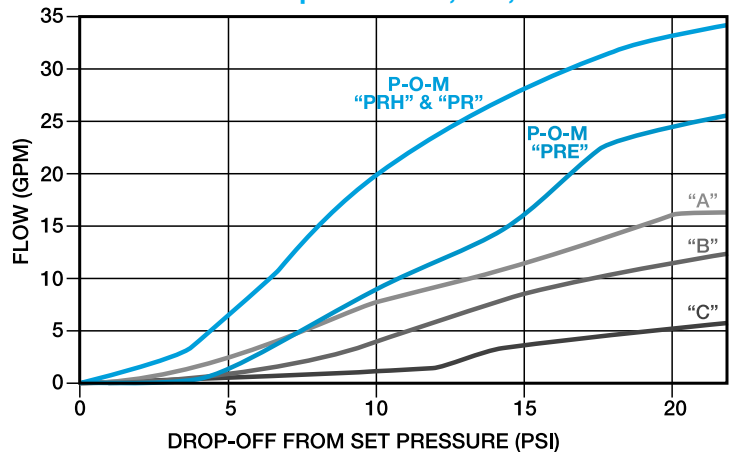


Dimensions:

Series "PRH" Pressure Regulator Dimensions

Dim	SIZE NPT or BSP						
	1/4	1/2	3/4	1	1 1/2	2	3
A Inch mm	2 51	2 1/2 64	2 7/8 73	2 7/8 73	2 7/8 73	2 7/8 73	5 1/4 133
B Inch mm	1 3/8 35	1 1/16 27	15/16 24	15/16 24	15/16 24	15/16 24	5 102
C Inch mm	4 1/4 108	4 102	7 1/2 195	7 1/2 195	8 203	9 3/8 238	11 5/8 295
D Inch mm	1 1/4 32	2 51	2 13/16 71	2 7/8 73	3 3/8 86	5 1/8 130	6 3/8 162
E Inch mm	2 51	2 1/2 64	4 1/2 114	4 1/2 114	5 127	7 178	8 203

NOTE: Refer to Catalog PR and PRE for information on other Plast-O-Matic Pressure Regulator models.

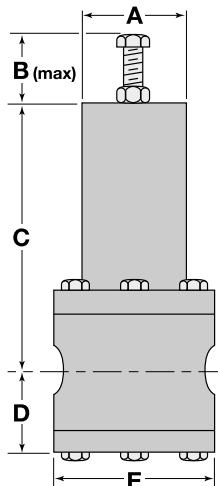

Model Number & Maximum Flow: Series "PRH"

Valve Size	Model Numbers		Flow Rates GPM*
	Buna-N Seals	Viton® Seals	
1/4"	PRH025B	PRH025V	5
1/2"	PRH050B	PRH050V	10
3/4"	PRH075B	PRH075V	35
1"	PRH100B	PRH100V	50
1 1/2"	PRH150B	PRH150V	70
2"	PRH200B	PRH200V	100
3"	PRH300B	PRH300V	200

For EPDM seals change "B" (or "V") to "EP"
*Maximum Recommended

PLAST-O-MATIC
VALVES, INC.

1384 Pompton Avenue, Cedar Grove, NJ 07009-1095
(973) 256-3000 • Fax (973) 256-4745
www.plastomatic.com • info@plastomatic.com

AUTHORIZED PLAST-O-MATIC DISTRIBUTOR